

Self-Regulating Heating Cable HTP



HTP is an industrial grade self-regulating heating cable that can be used for temperature maintenance or freeze protection of pipelines and vessels. It can be used in non-hazardous and ex-hazardous areas.

The power output adjusts automatically in response to the ambient temperature.

Because of its self-regulating characteristics it will not overheat even when the cable is overlapped. This guarantees maximum safety and reliability.

The installation of HTP heating cable is quick and simple and requires no special skills or tools. Because of its parallel construction the power output of the heating cable is everywhere the same. Thus it can be fitted on site to exact piping length without any complicated design calculations.

Features

- 10, 20, 33 or 40 W/m
- Ex-approved solution
- Self-regulating, automatically adjusts power output in response to ambient temperature
- Thermoplastic or Fluoropolymer overjacket
- Easy to install
- Can be cut to required length on site without any complicated design calculations
- Will not overheat even when overlapped
- Can be used in explosive environments without temperature limiter
- Full range of accessories available

Application Areas

- Temperature maintenance or freeze protection of pipelines and vessels in non-hazardous and ex-hazardous areas



Construction

1. 1.25 mm² nickel-plated copper conductors
2. Semi-conductive self-regulating matrix
3. Matrix insulation
4. Tinned copper braid
5. Overjacket Thermoplastic or Fluoropolymer

Self-Regulating Heating Cable HTP




Technical Data

| | |
|---|----------------------|
| Rated voltage | 230 VAC |
| Maximum continuous operating temperature (trace heater energized) | 65 °C |
| Maximum continuous exposure temperature (trace heater de-energized) | 85 °C |
| Ambient temperature range | -60 ... +55 °C |
| Minimum installation temperature: | |
| Thermoplastic elastomer overjacket | -30 °C |
| Fluoropolymer overjacket | -60 °C |
| Minimum bending radius | 25 mm |
| Maximum braiding resistance | 10 Ohm/km |
| Conductor cross-section | 1.25 mm ² |
| Dimension: | |
| Thermoplastic elastomer overjacket | 13.20x6.10 mm |
| Fluoropolymer overjacket | 12.80x5.70 mm |
| Weight: | |
| Thermoplastic elastomer overjacket | 141 kg/km |
| Fluoropolymer overjacket | 152 kg/km |

Power Output Curve

Nominal power output at rated voltage 230 VAC.

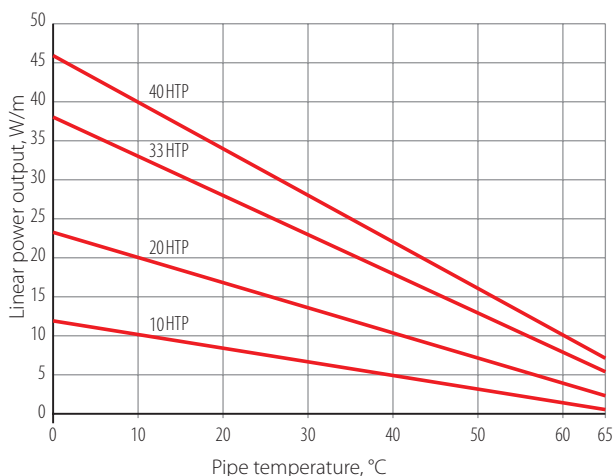

Max. Heating Circuit Length

For use with type C circuit breakers according to IEC 60898-1:2015

| Type | Turn-on temperature, °C | Heating circuit length/m at 230 VAC | | |
|-------|-------------------------|-------------------------------------|-----|-----|
| | | 16A | 20A | 32A |
| 10HTP | 10 | 205 | - | - |
| | -20 | 123 | 165 | 195 |
| 20HTP | 10 | 116 | 140 | - |
| | -20 | 60 | 80 | 115 |
| 33HTP | 10 | 70 | 90 | 108 |
| | -20 | 45 | 58 | 85 |
| 40HTP | 10 | 56 | 73 | 91 |
| | -20 | 31 | 47 | 72 |

Approvals



II 2 GD
Ex 60079-30-1 IIC T6 Gb
Ex 60079-30-1 IIIC T85°C Db
Certificate No:
Sira 17ATEX3335U



Certificate No:
IECEX CCVE 17.0006U
IECEX CCVE 17.0007X



Marking

Example: 33HTP2-BT

Linear power output, W/m @ +10 °C _____
Cable type _____
Supply voltage: 2 – 230 VAC _____
Screen type: B – tinned copper wire braiding _____
Overjacket material: T – thermoplastic elastomer, P – fluoropolymer _____

Types

| Overjacket type | Order code | Overjacket color | Name | Power output, W/m |
|--|------------|------------------|-----------|-------------------|
| Thermoplastic elastomer overjacket, braiding | 3201002006 | Black | 10HTP2-BT | 10 |
| | 3201002008 | | 20HTP2-BT | 20 |
| | 3201002010 | | 33HTP2-BT | 33 |
| | 3201002011 | | 40HTP2-BT | 40 |
| Fluoropolymer overjacket, braiding | 3201002012 | Blue | 10HTP2-BP | 10 |
| | 3201002014 | | 20HTP2-BP | 20 |
| | 3201002016 | | 33HTP2-BP | 33 |
| | 3201002017 | | 40HTP2-BP | 40 |